



Speaker Model:Re

IAPHRAGM	MTL:Rubber+Ceramic
NOMINAL	IMPEDANCE: 4.0±15% Ω
DCR	IMPEDANCE: 3.4±10% Ω
SENSITIVITY	1W/1M: 87.0±3 dB
FREQUENCY RESPONSE:	50-10K Hz
FREE AIR RESONANCE:	50±20% Hz
VOICE COIL DIAMETER:	35.5 mm
RATED POWER INPUT:	20 W
MAXIMUM POWER INPUT:	40 W
MAGNET WEIGHT(OZ):	NEO
FERRO FLUID ENHANCED:	NO
	Qms: 4.1
	Qes: 0.54
	Qts: 0.47
	BL: 4.8

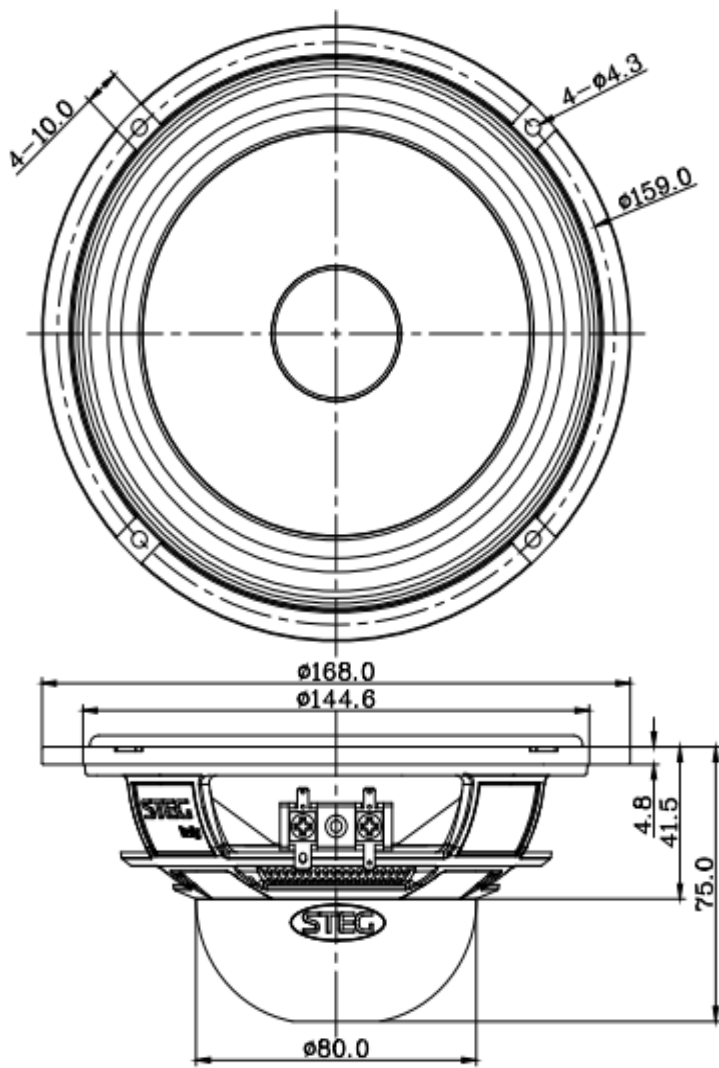

SPL vs Freq

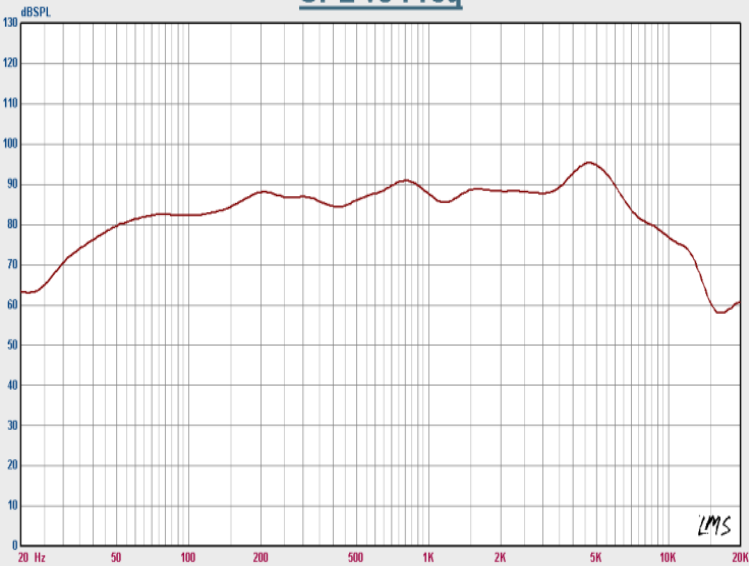

Impedance vs Freq

